


仕様

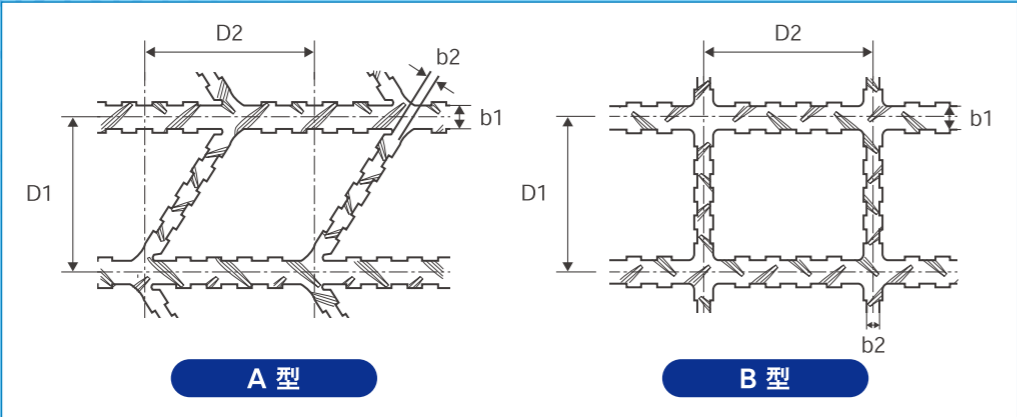

グリッドメタル[®]

コンクリート構造物の補修・補強用 格子鋼板筋

NETIS
登録番号
QS-150039-A

標準的な寸法

板厚 t (mm)	縦筋					横筋		
	ピッチ D1 (mm)	幅 b1 (mm)	断面積 A1 (mm ²)	相当する鉄筋		ピッチ D2 (mm)	幅 b2 (mm)	断面積 A2 (mm ²)
				呼び名	公称断面積 (mm ²)			
4.5	75	4	18	5	19.6	75	4	18
6	100	6	36	D6	31.67	100	6	36
6	100	12	72	D10	71.33	100	7	42
9	100	15	135	D13	126.7	100	7	63
9	100	23	207	D16	198.6	100	7	63
12	100	24	288	D19	286.5	100	7	84
16	100	18	288	D19	286.5	100	7	112
16	100	25	400	D22	387.1	100	7	112
16	100	32	512	D25	506.7	100	7	112


注)寸法や形状については個別にお問合せ下さい。

材質


記号	板厚 (mm)	引張試験		備考
		降伏点 または耐力 (N/mm ²)	引張強さ (N/mm ²)	
JFE-HCP400-1	6.0~13.0	245≦	400~510	縞鋼板 構造用 SS400相当
SS400	6.0~16.0	245≦	400~510	JIS G 3101
SM490A	6.0~16.0	325≦	490~610	JIS G 3106



エポキシ樹脂塗装による防食

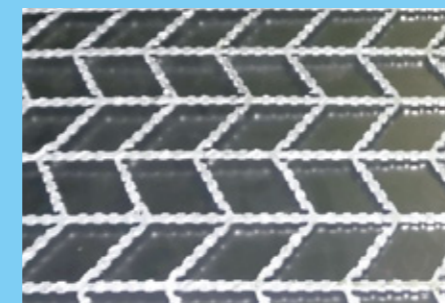

溶融亜鉛めっきによる防食

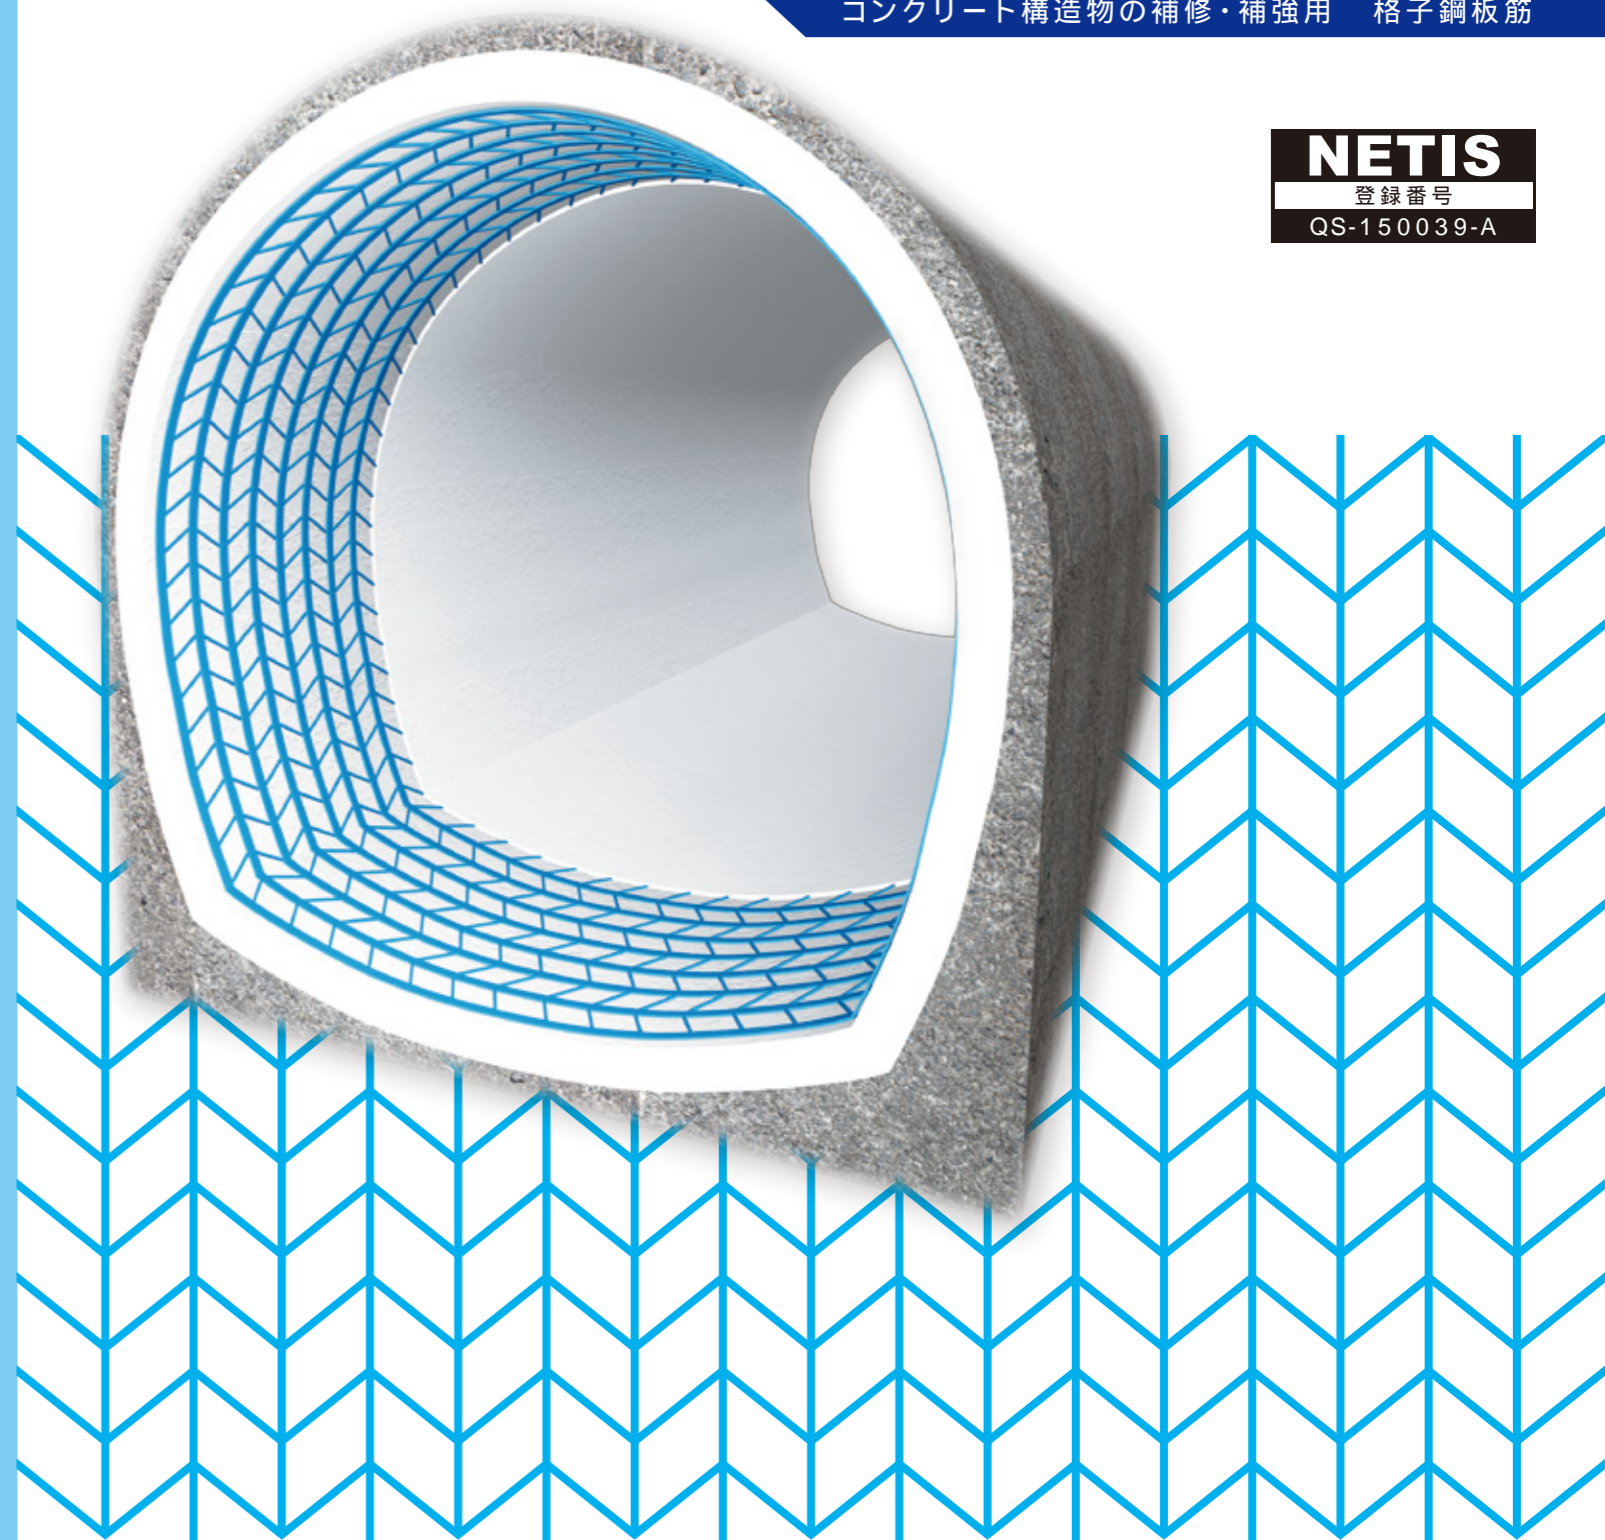




お問い合わせ先

JFE シビル 株式会社
JFE
<https://www.jfe-civil.com>

社会基盤事業部 営業部
〒111-0051 東京都台東区蔵前2丁目17-4 JFE蔵前ビル4階
TEL:03-3864-3796 FAX:03-3864-7319

JFE シビル 株式会社
JFE

グリッドメタル®

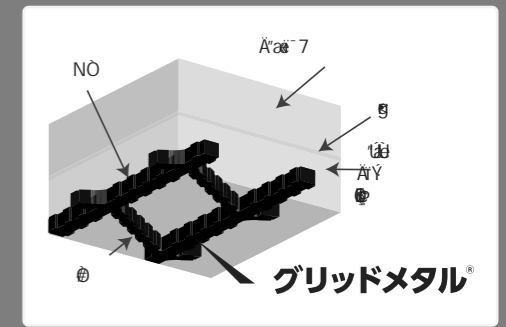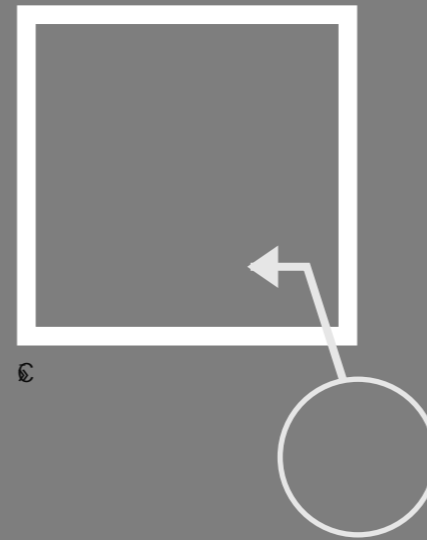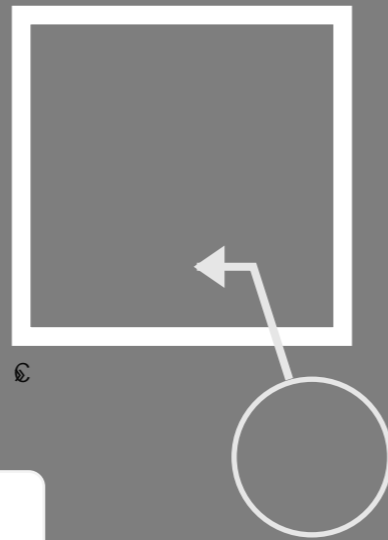

グリッドメタル® の wD

- NO
-
-
-

①



②



③



④

